




Special option available upon request

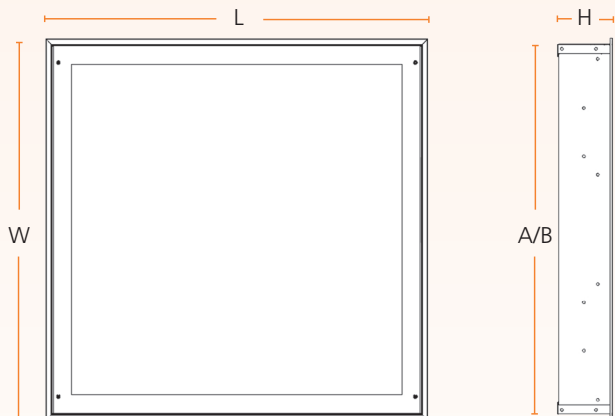

L, mm	W, mm	H, mm	A, mm	B, mm
595	595	85	576	578
1195	295	85	1177	278

**IGENE** is a range of IP65 rated recessed luminaires ideal for use in pharmaceutical, medical or general sterile areas. Supplied c/w opal acrylic UV stable diffuser secured via four stainless steel fixing screws. Colour temperature 4000K. Support brackets required when installing into a plasterboard ceiling (Part No: IGPSB)

Product Code	Description	Weight
IGEN34	595x595mm 40W Led IP65 4420 lumen 4000K	4.5kg
IGEN43	595x595mm 59W Led IP65 5770 lumen 4000K	4.5kg
IGEN34	1195x295mm 42W Led IP65 4420 lumen 4000K	4.5kg
IGEN49	1195x295mm 63W Led IP65 6130 lumen 4000K	4.5kg
IGPSB	Plasterboard support brackets	
/ E3	Integral 3hr emergency	
/ DD	DALI control	

### Options

- DALI
- 3000K Colour Temperature
- TP(a) polycarbonate diffuser
- Other lumen outputs available upon request.

### Features

- IP65 (front face only)
- Stainless steel fixings
- UV stable opal acrylic diffuser
- 75,000hr L80B50